

LC 12CC


OIL-LUBRICATED ROTARY VANE VACUUM PUMP



TECHNICAL DATA

LC 12CC		
Part number		9605008
Nominal flow rate	CFM	7.05
Final total pressure	Torr (Abs)	1.5
Max inlet pressure for water vapour	Torr (Abs)	26.25
Max water vapour pumping rate	lb/h	0.65
Continuous operating range	Torr (Abs)	300 ÷ 1.5
Maximum inlet air temperature	°F	104
Oil type		SW 40
Oil capacity (Min - Max)	in³	18.3 ÷ 24.4
Noise level (UNI EN ISO 2151±3dB)	dB(A)	62
Weight	LBS	30.8

CURVES

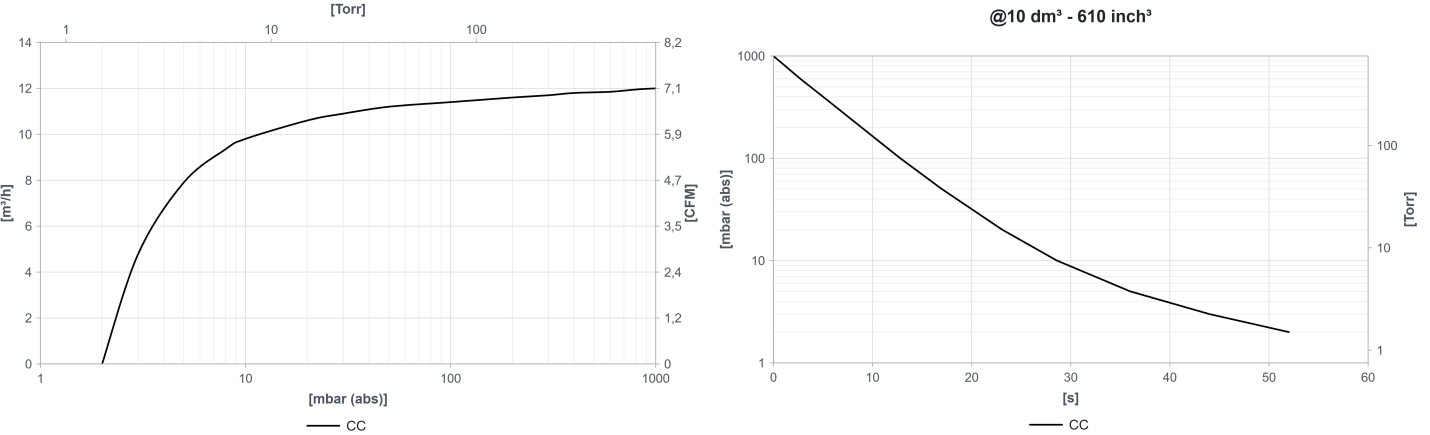


NOTE: Curves refer to suction pressure and temperature of 20°C (tolerance ±10%)

LC 12CC

OIL-LUBRICATED ROTARY VANE VACUUM PUMP

DIMENSIONS

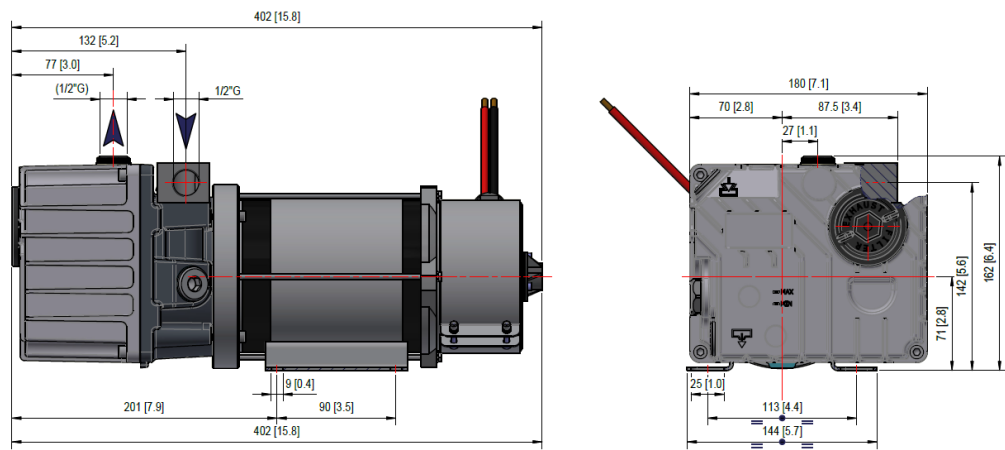


MOTORS

LC 12CC [12 Vdc]						
ID	POWER [Hp]	VOLTAGE [V]	FREQUENCY [Hz]	EFFICIENCY	RPM	Notes
CA	0.6	12V	DC	////	2800	S3 15% - 50'
LC 12CC [24Vdc]						
CB	0.6	24V	DC	////	2800	S3 15% - 50'

LC 12CC

OIL-LUBRICATED ROTARY VANE VACUUM PUMP

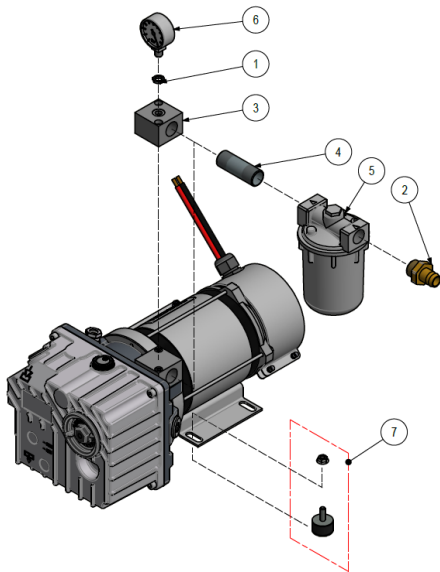

ACCESSORIES

		PART NUMBER
1	Nut	0202001
2	Hose barb fitting ATG	2103010
3	Inlet fitting	4508031
4	Pipe	5001003
5	FCT Filtre	9001010
6	VMR Vacuum Gauge	9009004
7	Anti-vibration mount kit	KA000002

09/25/2026 09:13 AM Subject to change without notice