


LC 8


OIL-LUBRICATED ROTARY VANE VACUUM PUMP

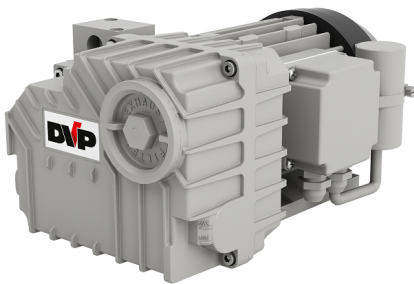

TECHNICAL DATA

LC 8		
Part number		9601073
Frequency	Hz	50 60
Nominal flow rate	CFM	4.7 5.3
Final total pressure	Torr (Abs)	1.5
Maximum inlet air temperature	°F	104
Oil type		SW 40
Oil capacity	in³	15.25
Noise level (UNI EN ISO 2151±3dB)	dB(A)	56 58
Weight	LBS	22

CURVES

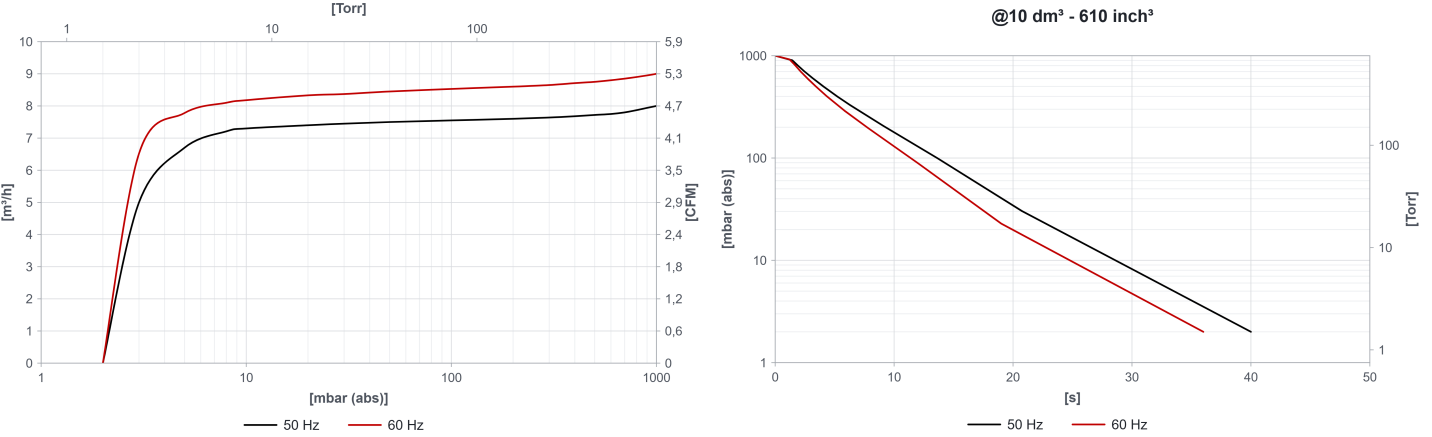


NOTE: Curves refer to suction pressure and temperature of 20°C (tolerance ±10%)

LC 8

OIL-LUBRICATED ROTARY VANE VACUUM PUMP

DIMENSIONS

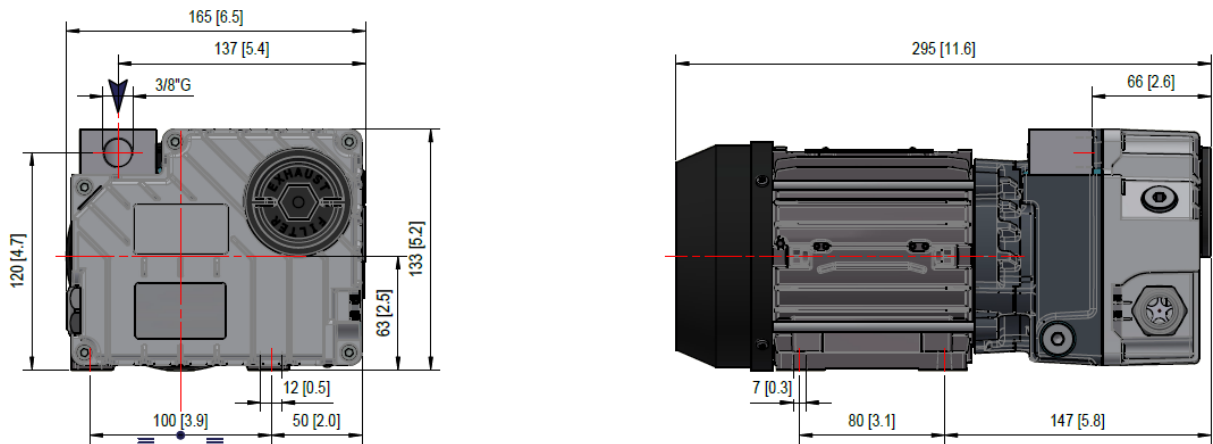


MOTORS

LC 8 [1 Phase]						
ID	POWER [Hp]	VOLTAGE [V]	FREQUENCY [Hz]	EFFICIENCY	RPM	Notes
MA	0.35	220 - 240	50	////	2800	S3 75%
	0.4		60		3300	
MX	0.5	110 - 115	60	////	2800	S3 75% - UL
LC 8 [3 Phase]						
TX	0.35	Δ230 / Y400	50	IE2	2800	
	0.35	Δ265 / Y460	60		3300	

09/24/2026 05:06 PM Subject to change without notice

LC 8

OIL-LUBRICATED ROTARY VANE VACUUM PUMP

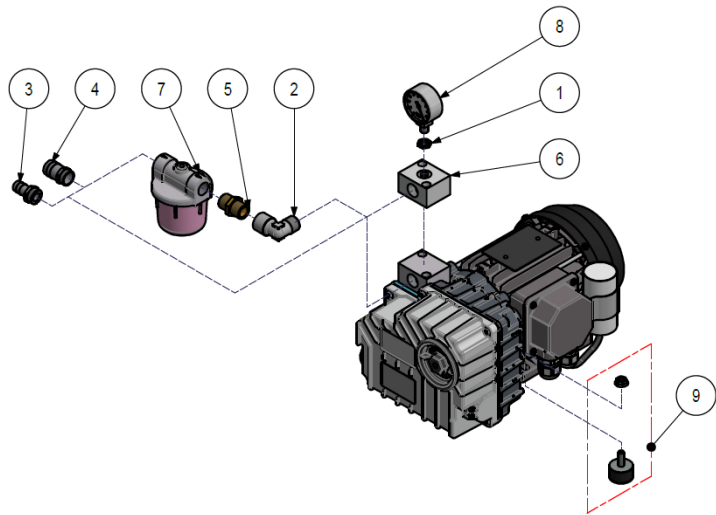

ACCESSORIES

		PART NUMBER
1	Nut	0202001
2	Elbow fitting	2101008
3	Hose barb fitting ATG	2103007 (Ø12)
4	Hose barb fitting ATG	2103009 (Ø17)
5	Nipples	2201006
6	Inlet fitting	4508089
7	Cartridge Filter	9001004/0
8	VMR Vacuum Gauge	9009004
9	Anti-vibration mount kit	KA000002